

# SPECIFICATIONS




## SC301 30" Single Convection Oven

Appearance	
Flat Flush Frame	✓
Sens-A-Touch™ Electronic Control In Glass	✓
Oven Capacity - Cubic Feet, Upper or Single Oven	4.1
Finish: Black, White or Stainless Steel: Monochromatic Handle	✓
Finish: Stainless Steel with Black Handle	✓
Finish: Stainless Steel with Professional Handle	✓
Performance	
4 Cooksmart™ Combination Cooking Models	-
Dual Element Bake	Yes
Variable Broil	Yes
Third Element Convection	Yes
Convection - Roast	Yes
Convection - Broil	-
Temperature Probe	-
Timed & Delay Timed Mode	✓
Convenience	
Self-Cleaning Oven(s)	✓
Interior Venting	
Motorized Door Lock(s)	✓
Minute Timers	2
Child Lock-Out	Care and Use Manual
Rack Positions	6
Number of Racks	3
Dual-Level Halogen Lights	A/M
General Information	
Broil/Bake Wattage	3,600/2,800
Third Element Wattage	2750
Dual-Rated 120/208-240 Volts, 3-Wire, 60HZ	✓
AMPS	20
Approximate Shipping Weight (LBS.)	165
Dimensions	
Overall Dimensions - A* †	28 5/8
Overall Dimensions - B* †	29 3/4
Overall Dimensions - C*	23 7/8
Overall Dimensions - D* **	22
Upper / Single Oven Interior Dimensions - Height	16 1/4
Upper / Single Oven Interior Dimensions - Width	25
Upper / Single Oven Interior Dimensions - Depth	17 1/2

Lower Oven Interior Dimensions - Height	-
Lower Oven Interior Dimensions - Width	-
Lower Oven Interior Dimensions - Depth	-
Custom Panel Dimensions - Height	-
Custom Panel Dimensions - Depth	-

Accessories			
Model #	Name	Shipping Weight	MSRP
KIT130TMH	Tape Kit for S301, SC301 or C301	1 lbs	\$29.00
D30SXS	Black Trim Piece	3 lbs	\$39.00
D30SXS	White Trim Piece	3 lbs	\$39.00

**Overall Dimensions**

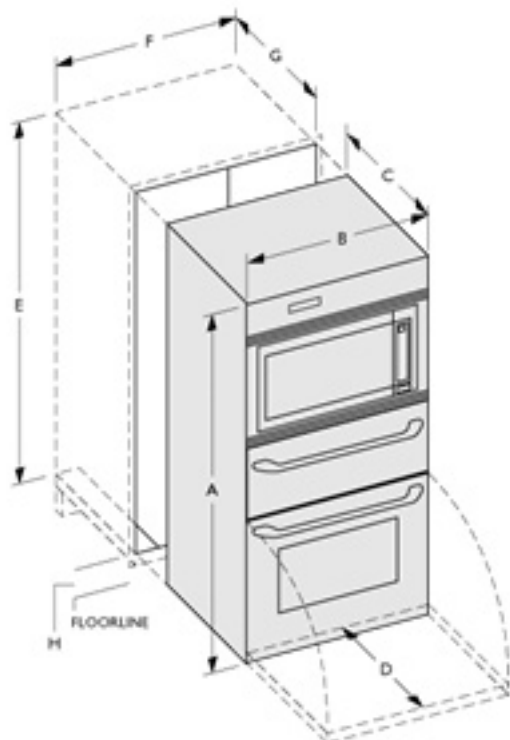

Sens-A-Touch is a trademark of Touch Sensor Technologies

Notes: All height, width and depth dimensions are shown in inches. For a detailed listing of approved cooktop models for this installation please refer to oven installation instructions.

\*Please refer to installation instructions prior to making cutout.

\*\*Largest door.

†Add 1/16" height and 1/8" width for stainless steel models (S-Series only.)

All models are UL approved. Select 30" models are CUL approved for sales in Canada. For immediate critical installation dimensions by fax, use your fax handset and call (775) 833-3600. Use code #8030 for a directory of Thermador products.